

# FRESNEL 50

## LEDNIT220

Compact LED fresnel with 17° - 50° zoom  
High CRI (>91) for beautifully rendered surfaces  
Soft-edged 3500K warm white coverage

Dimming via manual knob or DMX  
Barndoor and gel frame accessories included



# FRESNEL 50

## LEDNIT220

Compact LED fresnel, featuring:

- 17° - 50° zoom for convenient versatility across many applications
- High CRI (>91) for natural rendering of complexions and surfaces
- Soft-edged coverage with extremely consistent 3500K warm white field
- Flicker-free output for worry-free video
- Quiet operation suitable for studio use
- Rugged die-cast body and low-maintenance design
- Power In and Out connections for linking multiple units
- Flawless dimming with consistent colour temperature throughout the dimming curve
- Included barndoors for shaping light output
- Included gel frame for attaching colour filters
- DMX + Manual dimming control knob




### Specifications

Product	FRESNEL 50
Code	LEDNIT220
Lamp Source	1 x 50W
Power Supply	100-240V AC, 50/60 Hz
Power Consumption	64W
DMX Connection	3-pin XLR In/Out

Colour Temperature	3500K >91 CRI White LED
DMX Channels	1 / 3
Beam Angle	17° - 50°
Output	2,500 lux @ 3 meters
Dimensions	305 (L) x 285 (W) x 280 (H) mm
Weight	4kg



### Photometrics

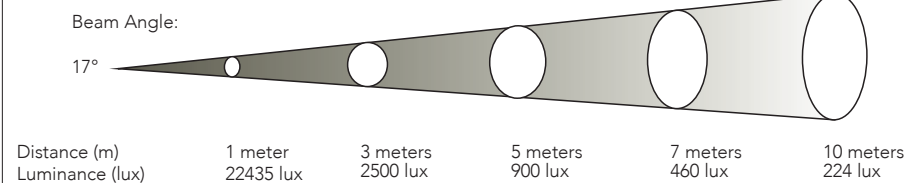

### Photometrics

